

SL-750


Size: 1/2AA

> iXtra – long term high performance


Performance Data

(Typical values for batteries stored at +25 °C for one year)


System	Lithium Thionyl Chloride
Nominal voltage	3.6 V
Nominal capacity	1.1 Ah
Nominal current	1 mA
Max. continuous discharge current	50 mA
Pulse current capability	100 mA
Anode surface area	6 cm ²
Lithium content	0.35 g
Weight	9.6 g
Volume	4 cm ³
Temperature range	-55 °C ... +85 °C

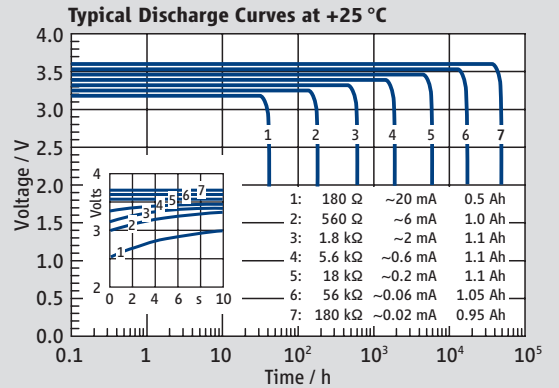


SL-750/S

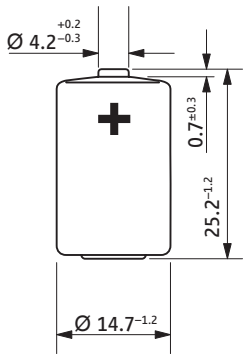


SL-750/T




SL-750/P

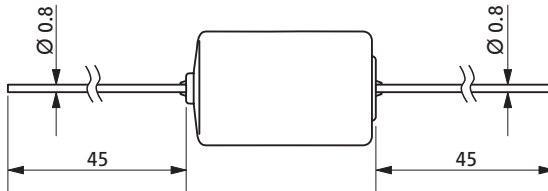

SL-750/PR



SL-750/PT



Available Terminations

Termination	Catalogue No.
SL-750/S Standard	11 1 07501 00
SL-750/T Tags	11 1 07502 00
SL-750/P Pins	11 1 07503 00
SL-750/PR Pins radial	11 1 07506 00
SL-750/PT Polarized tags	11 1 07508 00

WARNING:
Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.

